

GEFF SPC

GEFFVINYL SPC

# GOODRICH SOLUTIONS FLOORING GEFF SPC



Goodrich Global  
SINCE 1983

## STONE POLYMER COMPOSITE



*We've got you  
Covered!*



GEFFVINYL SPC

2023 - 2025

COMMERCIAL | HOSPITALITY | RESIDENTIAL | EDUCATION





Antibacterial  
(JIS Standard)



Certified  
Low VOCs



Easier  
Maintenance



Easy Installation  
& Replacement



Ultra Water  
Resistant

## Technical Specifications

### Installation Guidelines

- Prior to installation, the subfloor must be heated for -14 days if heating is available, and if not, allow sufficient time to dry out completely.
- Room temperature must be maintained at 18°C or higher before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the ground to avoid bending the floor.
- Prior to installation, please ensure that both color and lot# are as per order.
- When installing Geff SPC, be sure to keep dust, dirt or foreign particles away from the locking strip.

### Maintenance

- Regularly sweep floor to remove sand and grit that can scratch the floor.
- For best result, use only water with a mop. Avoiding flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep Geff SPC on flat surface to keep it from warping.

Item	Standard Reference	Main Parameter
Name		CLICK SPC 4.0/0.55mm + 1.0mm IXPE
Size	EN ISO 24342	Deviation ≤0.15% of nominal length up to mm maximum
Overall thickness	EN ISO 24346	4.0mm + 1.0mm IXPE
Wear layer thickness	EN ISO 24340	0.55mm
Total mass per unit area	EN ISO 23997	13%/-10%
Squareness and straightness	EN ISO 24342	Pass
Dimensional stability after exposure to	EN ISO 23999	≤0.25%
Curling after exposure to heat	EN ISO 23999	≤2mm
Usage classification	EN ISO 10874	23,33,42
Abrasion resistance	EN 660-2	Group T
Slip resistance	EN 13893	DS
	DIN 51130	R10
Color fastness to artificial light	EN ISO 105 B02	≥6
Flexibility	EN ISO 24344	20mm
Effect of castor chair	ISO 4918	Pass
Impact sound reduction	ASTM E 492-09	IIC=58
Chemical resistance	EN ISO 26987	GOOD
Toxicity	EN71	Non-toxic
Resistance to staining	EN ISO 26987	GOOD
Heavy metals	Rohs	ND
Phthalate	EN 14372	ND
Formaldehyde emission	EN 717-1	E1
Fire classification	EN 13501-1	Bf1-s1
Underfloor heating		Not more than 28°C
Antibacterial	JISZ2801	Pass
SVHC	REACH	Pass
VOC	DIBT/AgBB	Pass
	French VOC Regulation	A+
	California Specification 01350	Pass



# GEFF SPC



GSP-001 Ivory Oak  
1219.2mm x 177.8mm



GSP-002 Silver Oak  
1219.2mm x 177.8mm



GSP-003 Ash Oak  
1219.2mm x 177.8mm

# GEFF SPC



GSP-004  
American Chestnut  
1219.2mm x 177.8mm



GSP-005 Vintage Oak  
1219.2mm x 177.8mm



GSP-006 Parish Oak  
1219.2mm x 177.8mm



GSP-007  
Weathered Timberland  
1219.2mm x 177.8mm


# GEFF SPC



GSP-008 European Oak  
1219.2mm x 177.8mm



GSP-009 Pewter Oak  
1219.2mm x 177.8mm

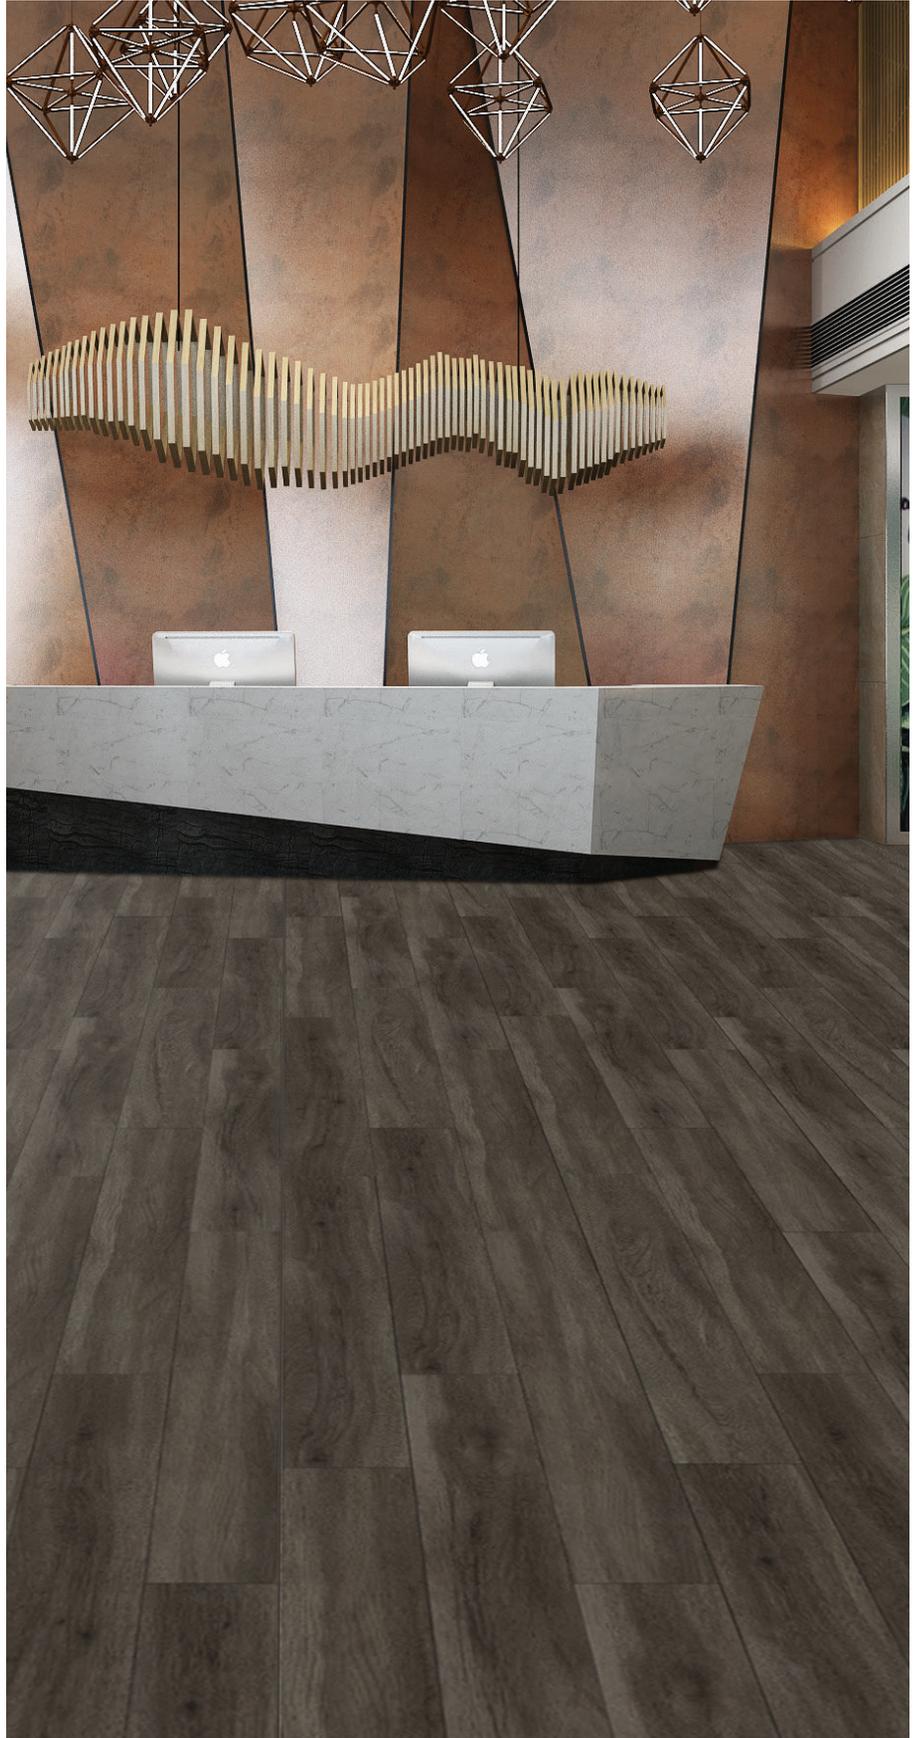

# GOODRICH SOLUTIONS FLOORING GEFF SPC

## WITH GOODRICH,

Your habitat becomes

A gallery of  
Your **self-expressions;**

A canvas for  
Your **creativity;**

A space for  
Your **soul;**

A showcase of  
Your **taste for life;**

Stay Connected - [www.goodrichglobal.com](http://www.goodrichglobal.com) | [info@goodrichglobal.com](mailto:info@goodrichglobal.com)

 /Goodrich.Global.Singapore

 /goodrich\_global

 /GoodrichGlobal

 /goodrichglobal

 /GoodrichGlobal

 /goodrichglobal

 /GoodrichGlobalOfficial

SINGAPORE [HQ] | MALAYSIA | THAILAND | VIETNAM | MYANMAR | INDIA | INDONESIA | UNITED ARAB EMIRATES | PHILIPPINES | CHINA | HONG KONG (CHINA)

Copyright © 2022 Goodrich Global. All rights reserved.