




Goodrich Global
SINCE 1983



BELIEVE IN BETTER™



WATER IS NATURE'S CURRENCY

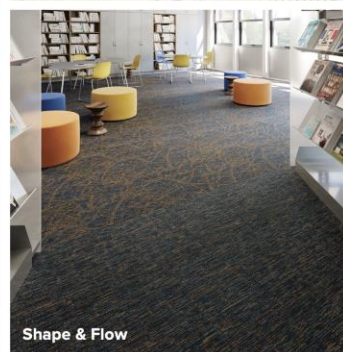





Relaxing Floors



 **SUSTAINERS**



Owls Collection

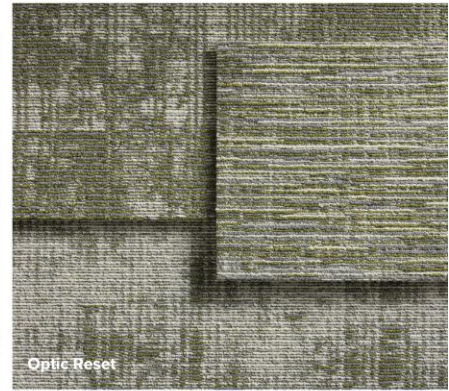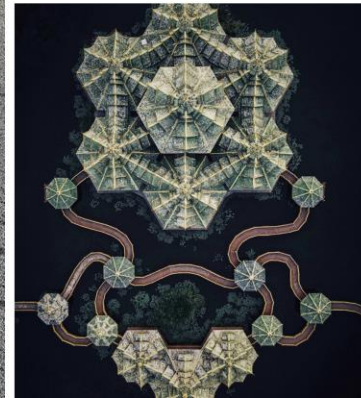

Optic Reset



 **SOCIAL SIGNS**



DECARBONIZE + DEMATERIALIZE



Did you know?

Mohawk recycles approximately 7 billion PET bottles each year. If placed end-to-end, the bottles would circle the earth 32 times.



Sketch Effect Collection



DESIGN

Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,585
Weight Density:	98,780
Stitches Per Inch:	11.0 (43.31 per 10 cm)
Finished Pile Thickness:	.082" (2.08 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Monolithic, Vertical Ashlar, Brick Ashlar, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static
-------------	--




593
Navy Gray



929
Light Elm




937
Steel



948
Brown Oak



979
Pencil Lead



989
Charcoal





Sketch Effect Collection



DESIGN

Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,000
Weight Density:	90,000
Stitches Per Inch:	11.0 (43.31 per 10 cm)
Finished Pile Thickness:	.090" (2.29 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Vertical Ashlar, Quarter Turn
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static
-------------	--




593
Navy Gray




929
Light Elm




937
Steel



948
Brown Oak



979
Pencil Lead



989
Charcoal







DESIGN

Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	5,192
Weight Density:	77,884
Stitches Per Inch:	11.0 (43.31 per 10 cm)
Finished Pile Thickness:	.104" (2.64 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Half Lap, Plank Half Lap, Herringbone
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static
-------------	--



593
Indigo Ink



929
Warm Neutral



937
Wet Cement



948
Rustic Taupe



979
Metal Grey



989
Dark Charcoal





Visual Edge Collection



DESIGN

Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	5,869
Weight Density:	88,043
Stitches Per Inch:	11.2 (44.09 per 10 cm)
Finished Pile Thickness:	.092" (2.34 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Random, Herringbone
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static
-------------	--



593
Indigo Ink



929
Warm Neutral



937
Wet Cement



948
Rustic Taupe



979
Metal Grey



989
Dark Charcoal





Renegade Collection



DESIGN

Tufted Pile Weight:	15.0 oz. per sq. yd. (509 g/m²)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	5,346
Weight Density:	80,198
Stitches Per Inch:	9.8 (38.58 per 10 cm)
Finished Pile Thickness:	.101" (2.57 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional, Monolithic, Brick Ashlar
GSA Stain Release Rating:	Pass
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	---



152
Living Fast



358
Thrill Seeker



751
Dare Devil



859
Glory Days



862
Tough Guy



883
Wild Thing



955
Cool Hand



983
Roust About



999
Leather Jacket

* China available color highlighted in red





Renegade Collection



DESIGN

Tufted Pile Weight:	15.0 oz. per sq. yd. (509 g/m²)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	5,094
Weight Density:	76,415
Stitches Per Inch:	9.8 (38.58 per 10 cm)
Finished Pile Thickness:	.106" (2.69 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional, Monolithic, Brick Ashlar
GSA Stain Release Rating:	Pass
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	---



152
Living Fast



358
Thrill Seeker



751
Dare Devil



859
Glory Days



862
Tough Guy



883
Wild Thing



955
Cool Hand




983
Roust About



999
Leather Jacket

* China available color highlighted in red

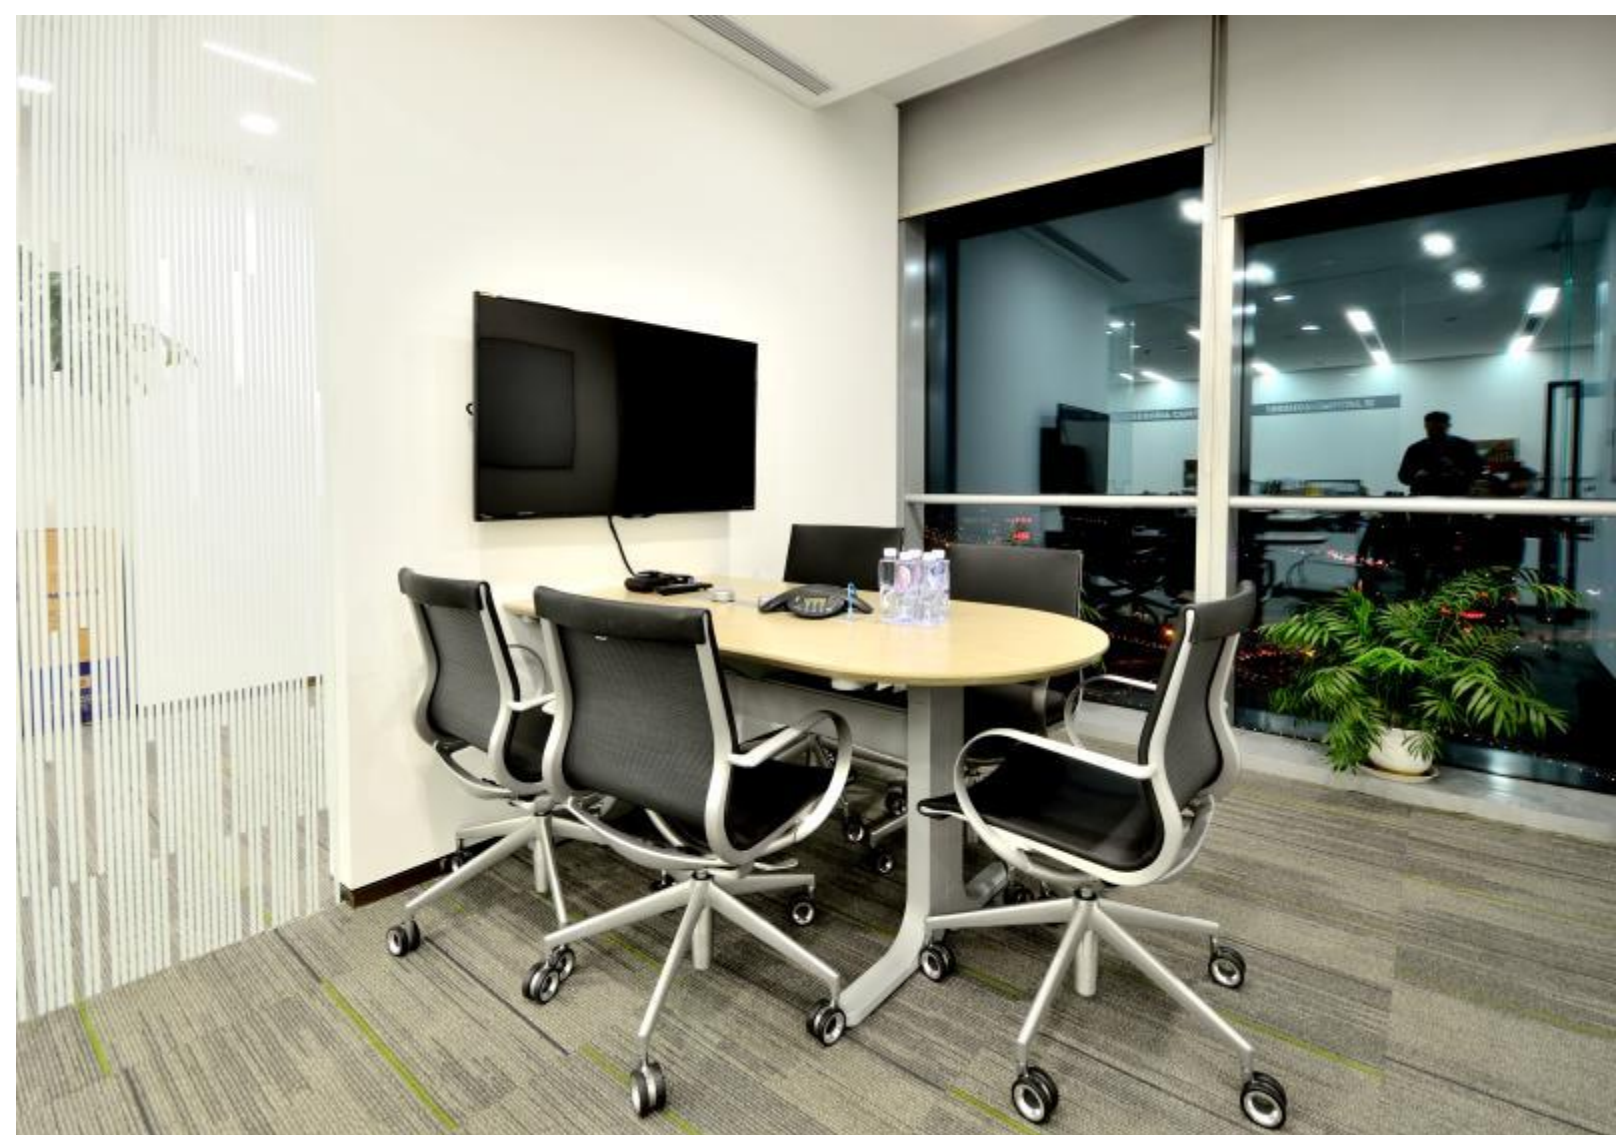

REINFORCE

- TRAIN
- TRAIN
- TRAIN
- TRAIN
- TRAIN

REINFORCE

- TRAIN
- TRAIN
- TRAIN
- TRAIN
- TRAIN

le RYAN



Renegade Collection



DESIGN

Tufted Pile Weight:	15.0 oz. per sq. yd. (509 g/m²)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10 cm)
Density:	5,000
Weight Density:	75,000
Stitches Per Inch:	10.2 (40.16 per 10 cm)
Finished Pile Thickness:	.108" (2.74 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Monolithic, Vertical Ashlar, Brick Ashlar, Quarter Turn, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	---



152
Living Fast



358
Thrill Seeker



751
Dare Devil



859
Glory Days



862
Tough Guy




883
Wild Thing



955
Cool Hand




983
Roust About



999
Leather Jacket



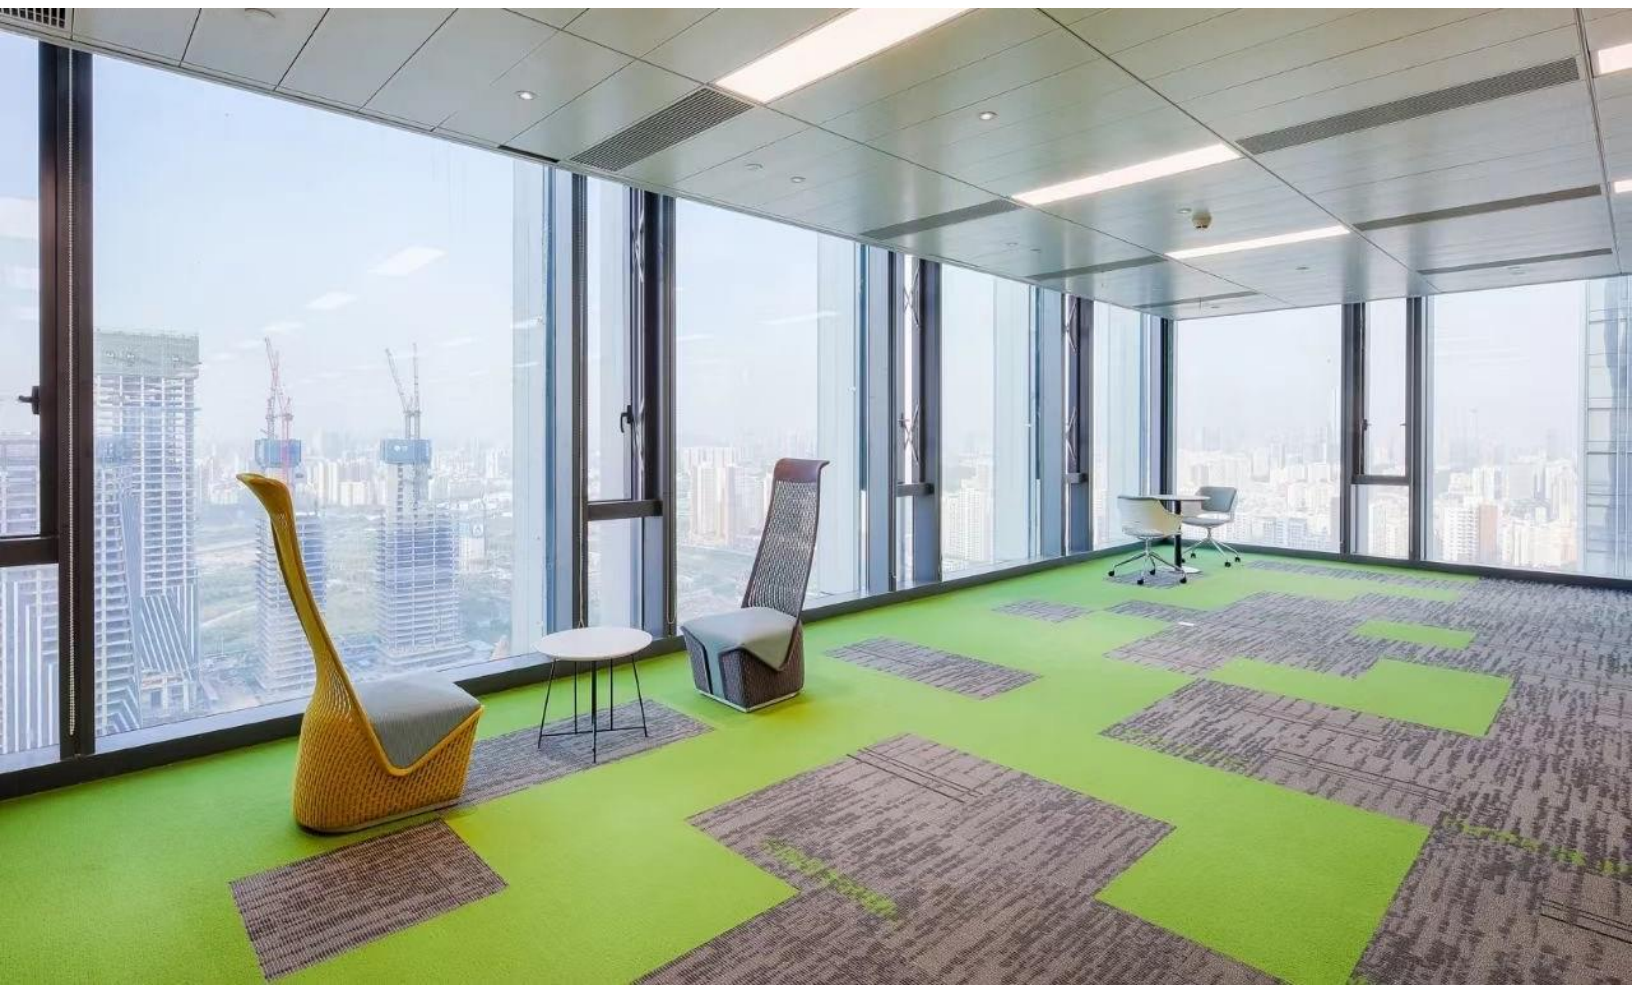

Art Intervention Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Level Patterned Loop
Gauge:	1/10 (39.37 rows per 10 cm)
Density:	5,647
Weight Density:	90,352
Stitches Per Inch:	12.2 (48.03 per 10 cm)
Finished Pile Thickness:	.102" (2.59 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Brick Ashlar
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class I (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static
-------------	--



149
Sunglow




259
Flame



263
Electric




439
Amethyst




569
Lapis



659
Mint



839
Sisal



939
Platinum





Art Intervention Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Level Patterned Loop
Gauge:	1/10 (39.37 rows per 10 cm)
Density:	5,333
Weight Density:	85,333
Stitches Per Inch:	12.2 (48.03 per 10 cm)
Finished Pile Thickness:	.108" (2.74 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Brick Ashlar
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class I (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static
-------------	--



362
Atomic



464
Eminence



575
Midnight




651
Chartreuse




676
Loden



847
Sand



878
Desert



959
Pewter



979
Iron



989
Jet



←

ENTRADA POR AQUÍ PARA
ACCEDER AL PASILLO
DE LOS SERVIDORES

Variant Form Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	5,760
Weight Density:	92,160
Stitches Per Inch:	12.5 (49.21 per 10 cm)
Finished Pile Thickness:	.100" (2.54 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Brick Ashlar, Vertical Ashlar, Monolithic, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



358
Concrete



751
Aggregate



859
Fuse



955
Lumen



983
Masonry



999
Asphalt

* China available color highlighted in red





Variant Form Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m²)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10 cm)
Density:	6,193
Weight Density:	99,096
Stitches Per Inch:	12.5 (49.21 per 10 cm)
Finished Pile Thickness:	.093" (2.36 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Brick Ashlar, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



358
Concrete



751
Aggregate



859
Fuse



955
Lumen



983
Masonry



999
Asphalt

* China available color highlighted in red





Variant Form Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	6,329
Weight Density:	101,274
Stitches Per Inch:	12.5 (49.21 per 10 cm)
Finished Pile Thickness:	.091" (2.31 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140 Good
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



358
Concrete



751
Aggregate



859
Fuse



955
Lumen



983
Masonry



999
Asphalt

* China available color highlighted in red



Iconic Earth Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m²)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10 cm)
Density:	8,704
Weight Density:	141,005
Stitches Per Inch:	10.0 (39.37 per 10 cm)
Finished Pile Thickness:	.067" (1.70 mm)
Dye Method:	Solution Dyed EcoFlex
Backing Material:	ICT Colorstrand® SD
Fiber Type:	Nylon Not Applicable
Pattern Repeat:	12" x 36" (.3048 m x .9144 m)
Size:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Installation Method:	Sentry Plus Stain Protection
Stain Release Technology:	Sentry Soil Protection
Soil Release Technology:	Heavy
Foot Traffic Recommendation TARR:	

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty
-------------	--



152
Rugged Range
Metallic



358
ClassicRidge
Metallic



751
Perfect Paths
Metallic




859
Downing Stone
Metallic



862
Canyon Clay
Metallic




883
Wild Terrain
Metallic



955
Solid Ground
Metallic



983
Clean Slate
Metallic



999
Daring Drift
Metallic

* China available color highlighted in red





Iconic Earth Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m ²)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	7,200
Weight Density:	116,640
Stitches Per Inch:	11.0 (43.31 per 10 cm)
Finished Pile Thickness:	.081" (2.05 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
Pre-Consumer Recycled Content:	46%
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	--



152
Rugged Range



358
Classic Ridge



751
Perfect Paths




859
Downing Stone



862
Canyon Clay



883
Wild Terrain



955
Solid Ground



983
Clean Slate



999
Daring Drift

* China available color highlighted in red





Iconic Earth Collection



DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m ²)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	8,576
Weight Density:	138,931
Stitches Per Inch:	11.2(44.09 per 10cm)
Finished Pile Thickness:	.068" (1.72 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Brick Ashlar, Vertical Ashlar, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty
-------------	---



152
Rugged Range



358
Classic Ridge



751
Perfect Paths




859
Downing Stone



862
Canyon Clay



883
Wild Terrain



955
Solid Ground



983
Clean Slate



999
Daring Drift

* China available color highlighted in red



Art Exposure Collection



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,181
Weight Density:	105,077
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	.099" (2.51 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT- NSF 140 Gold
Declare Label:	Declared

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



569
Cadet



853
Fallow



924
Platinum



958
Ecrú




959
Slate



989
Charcoal





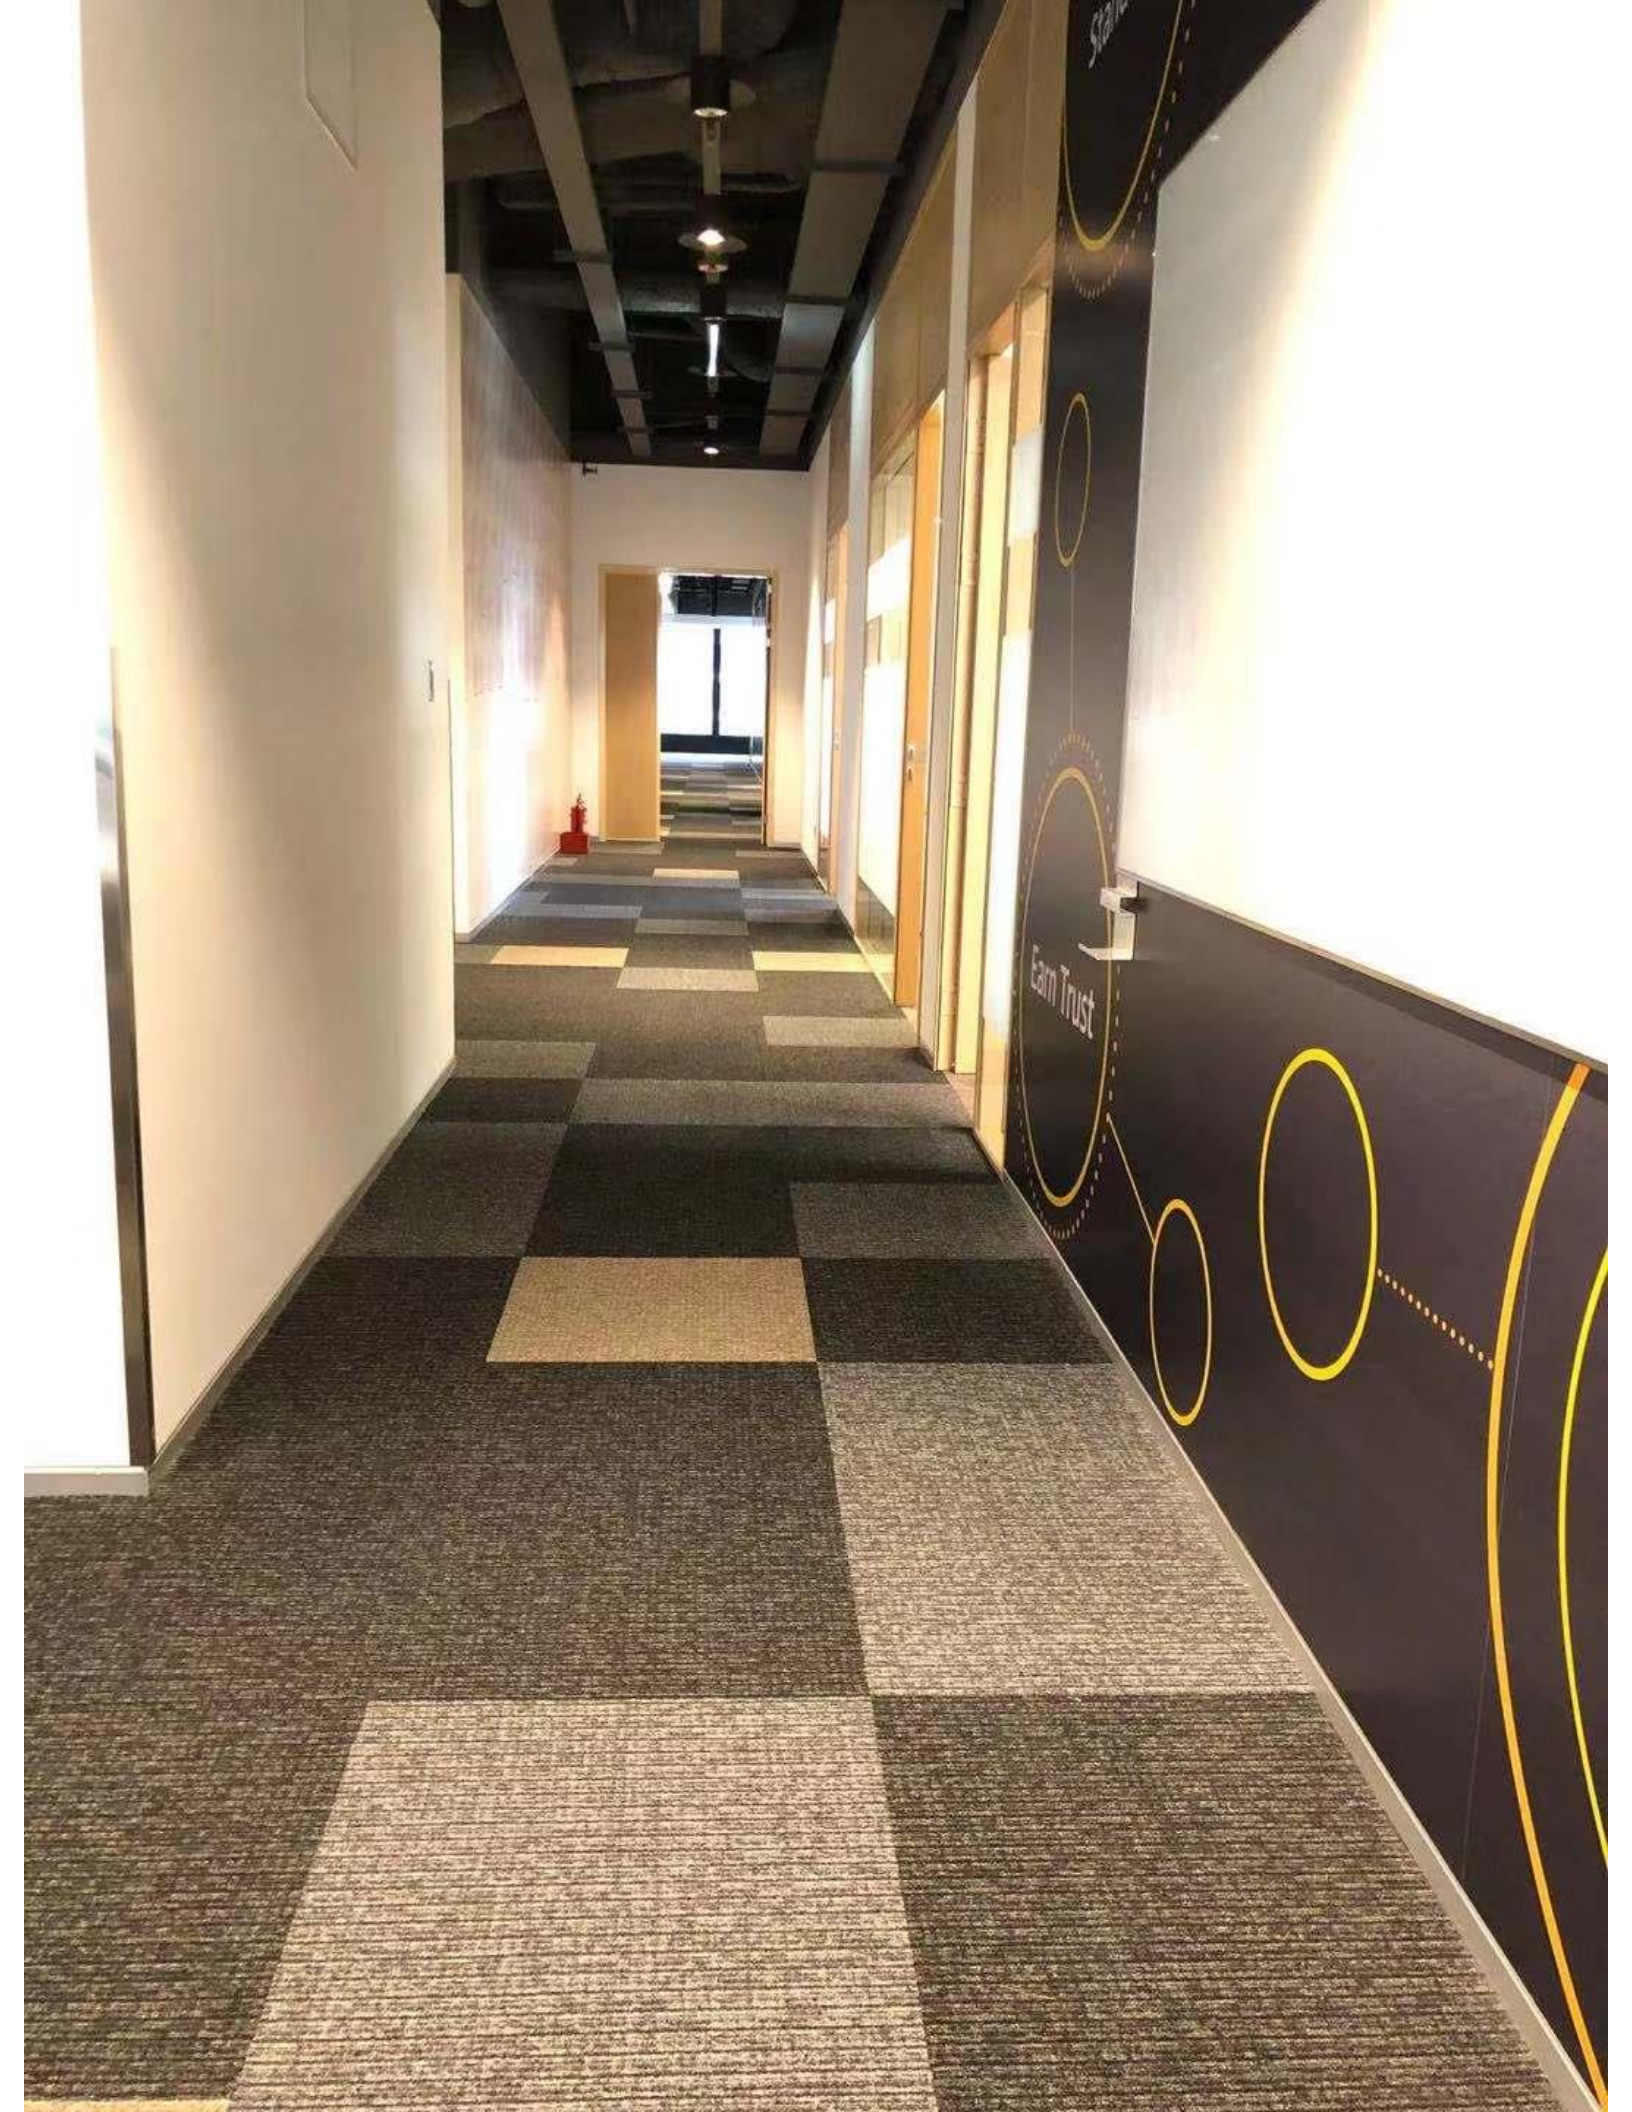


Art Exposure Collection



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,725
Weight Density:	114,625
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	.091" (2.31 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy



569
Cadet




853
Fallow



924
Platinum



958
Ecu



959
Slate



989
Charcoal

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---







Art Exposure Collection




DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,580
Weight Density:	111,860
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	.093" (2.36 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy



569
Cadet



853
Fallow




924
Platinum



958
Ecrú



959
Slate



989
Charcoal

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT- NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---





Art Style Collection



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	8,383
Weight Density:	142,520
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	.085" (2.15 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



569
Cadet



853
Fallow



924
Platinum



958
Ecu



959
Slate



989
Charcoal





Art Style Collection



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	7,285
Weight Density:	123,857
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	.084" (2.13 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT - NSF 140 Good
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



911
Mellow Yellow



913
Orange Crush



914
Purple Dawn



915
Blue Dusk



916
Lime Rush



919
Pink Berry



931
Neon Citron



933
Crimson Flash



944
Cotton Candy



946
Above Par



954
Purple Ash



955
Cosmic Sky







Art Style Collection



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	7,846
Weight Density:	133,384
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	.078" (1.98 mm)
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex NXT - NSF 140 Gold
Declare Label:	Declared Red List Free

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



559
Cadet Blaze



859
Fallow Reflection



929
Platinum Gleam



939
Ecrú Glimmer



949
Slate Burst



979
Charcoal Spark



Crossing Current Collection



DESIGN

Tufted Pile Weight:	16 oz/yd2 (649 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,063
Weight Density:	97,010
Stitches Per Inch:	11.4 (44.88 per 10 cm)
Total Thickness:	7 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT- NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



589
Jennings



898
Platte



975
Canning



976
Laurel



978
Alder



979
Firth



988
Seneca



989
Dakota

* China available color highlighted in red



Qualcomm



Crossing Current Collection



DESIGN

Tufted Pile Weight:	16 oz/yd2 (649 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	5,284
Weight Density:	84,550
Stitches Per Inch:	11.4 (44.88 per 10 cm)
Total Thickness:	7 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex ICT
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1171
NSF 140:	EcoFlex ICT- NSF 140 Gold
Declare Label:	Declared

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
-------------	---



589
Jennings



898
Platte



975
Canning



976
Laurel




978
Alder



979
Firth



988
Seneca



989
Dakota

* China available color highlighted in red



Shape & Flow Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Level Multi-Colored Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	16 oz/yd ² (543 g/m ²)
Finished Pile Thickness:	.207" (5.26 mm)
Total Thickness:	.188" (4.78 mm)
Stitches Per Inch:	10.5 (41.34 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Colorstrand® SD Nylon
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Density:	6,776
Weight Density:	108,423
Backing Material:	EcoFlex ICT
Installation Method:	Quarter Turn, Monolithic, Vertical Ashlar, Brick Ashlar, Multi Directional
Size:	24" x 24" (.6096 m x .6096 m)
Pattern Repeat:	Not Applicable

SUSTAINABILITY


NSF 140:	EcoFlex ICT - NSF 140 Gold
Indoor Air Quality:	CRI Green Label Plus GLP1171
Declare Label:	Declared

PERFORMANCE

Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450
Static Propensity:	AATCC-134 Under 3.5 KV
Foot Traffic Recommendation TARR:	Heavy
GSA Stain Release Rating:	Pass

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	--

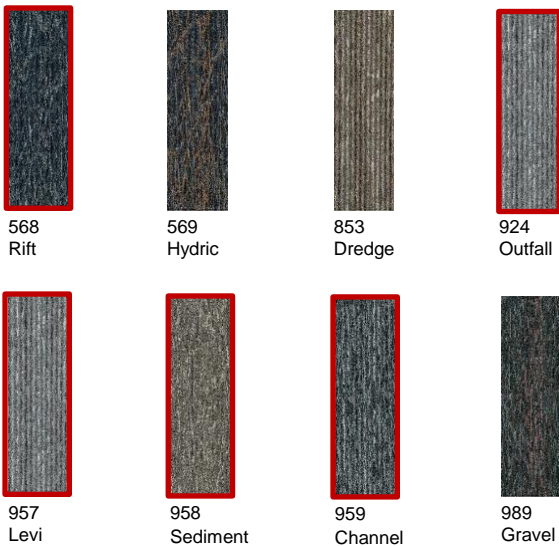

* China available color highlighted in red



Shape & Flow Collection

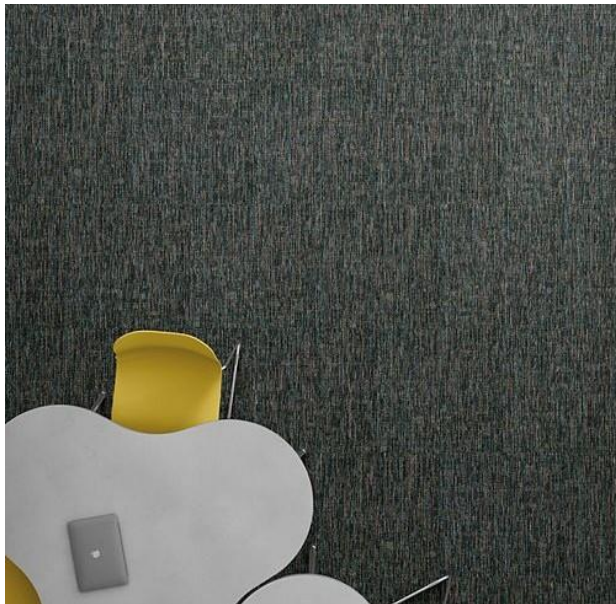

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Level Multi-Colored Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	16 oz/yd ² (543 g/m ²)
Finished Pile Thickness:	.085" (2.15 mm)
Total Thickness:	.093" (2.36 mm)
Stitches Per Inch:	11.5 (45.28 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Colorstrand® SD Nylon
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Density:	6,193
Weight Density:	99,096
Backing Material:	EcoFlex ICT
Installation Method:	Quarter Turn, Monolithic, Vertical Ashlar, Brick Ashlar, Multi Directional
Size:	24" x 24" (.6096 m x .6096 m)
Pattern Repeat:	Not Applicable

SUSTAINABILITY


NSF 140:	EcoFlex ICT - NSF 140 Gold
Indoor Air Quality:	CRI Green Label Plus GLP1171
Declare Label:	Declared

PERFORMANCE

Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450
Static Propensity:	AATCC-134 Under 3.5 KV
Foot Traffic Recommendation TARR:	Heavy
GSA Stain Release Rating:	Pass

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	--

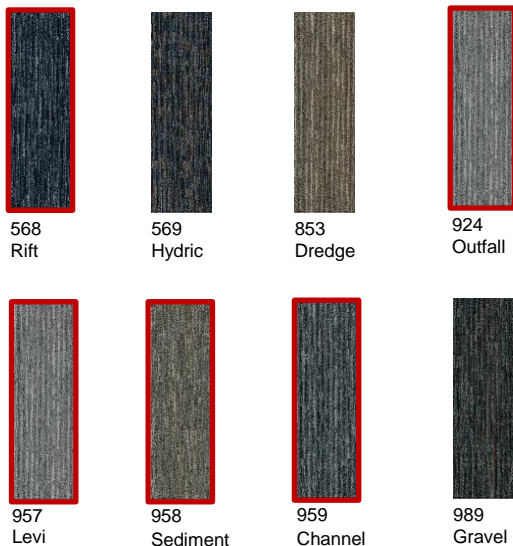

* China available color highlighted in red





Taking Steps Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	18 oz/yd2 (610 g/m2)
Finished Pile Thickness:	.098" (2.49 mm)
Total Thickness:	.236" (5.99 mm)
Stitches Per Inch:	13.0 (5.118 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain Release Technology:	Permanent, Built into the Fiber
Soil Release Technology:	EcoSentry Soil Protection
Density:	6,612
Weight Density:	119,020
Backing Material:	EcoFlex ICT
Installation Method:	Quarter Turn, Vertical Ashlar, Brick Ashlar, Multi Directional
Size:	24" x 24" (.6096 m x .6096 m)
Pattern Repeat:	Not Applicable

SUSTAINABILITY


NSF 140:	EcoFlex ICT- NSF 140 Gold
Indoor Air Quality:	CRI Green Label Plus GLP1171
Declare Label:	Declared

PERFORMANCE

Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450
Static Propensity:	AATCC - 134 Under 3.5 KV
Foot Traffic Recommendation TARR:	Heavy

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static
-------------	---



565 Franklin



566 Tennelli



853 Terese



855 Ramon



858 Li



955 Henry



956 Wright



958 Frizzle




969 Hudson



Taking Steps Collection

Mohawk Group

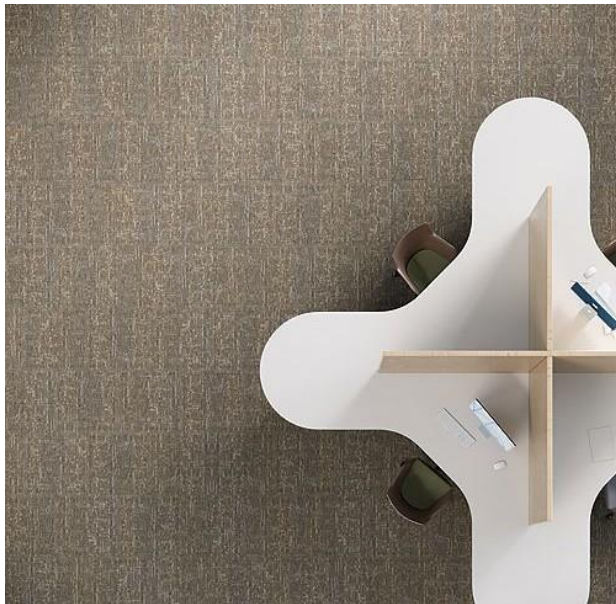

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	18 oz/yd2 (610 g/m2)
Finished Pile Thickness:	.085" (2.15 mm)
Total Thickness:	.212" (5.38 mm)
Stitches Per Inch:	13.0 (5.118 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain Release Technology:	Permanent, Built into the Fiber
Soil Release Technology:	EcoSentry Soil Protection
Density:	7,363
Weight Density:	137,223
Backing Material:	EcoFlex ICT
Installation Method:	Quarter Turn, Vertical Ashlar, Brick Ashlar, Multi Directional
Size:	24" x 24" (.6096 m x .6096 m)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

NSF 140:	EcoFlex ICT - NSF 140 Gold
Indoor Air Quality:	CRI Green Label Plus GLP1171
Declare Label:	Declared

PERFORMANCE

Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450
Static Propensity:	AATCC - 134 Under 3.5 KV
Foot Traffic Recommendation TARR:	Heavy

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static
-------------	---



565 Franklin



566 Tennelli



853 Terese



855 Ramon



858 Li



955 Henry



956 Wright



958 Frizzle



969 Hudson



Taking Steps Collection

Mohawk Group



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	18 oz/yd2 (610 g/m2)
Finished Pile Thickness:	.088" (2.23 mm)
Total Thickness:	.221" (5.61 mm)
Stitches Per Inch:	13.0 (5.118 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricolor Premium Nylon
Stain Release Technology:	Permanent, Built into the Fiber
Soil Release Technology:	EcoSentry Soil Protection
Density:	7,363
Weight Density:	132,545
Backing Material:	EcoFlex ICT
Installation Method:	Quarter Turn, Vertical Ashlar, Brick Ashlar, Multi Directional
Size:	24" x 24" (.6096 m x .6096 m)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

NSF 140:	EcoFlex ICT - NSF 140 Gold
Indoor Air Quality:	CRI Green Label Plus GLP1171
Declare Label:	Declared

PERFORMANCE

Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450
Static Propensity:	AATCC - 134 Under 3.5 KV
Foot Traffic Recommendation TARR:	Heavy

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static
-------------	---



565 Franklin



566 Tennelli



853 Terese



855 Ramon



858 Li



955 Henry



956 Wright



958 Frizzle



969 Hudson






DESIGN

Tufted Pile Weight:	16.0 oz. per sq. yd. (542 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned loop
Gauge:	1/12(47.00 rows per 10 cm)
Density:	6,620
Weight Density:	105,931
Stitches Per Inch:	10.0 (39.37 per 10 cm)
Finished Pile Thickness:	.087" (1.70 mm)
Dye Method:	Solution Dyed EcoFlex
Backing Material:	ICT Colorstrand® SD
Fiber Type:	Nylon Not Applicable
Pattern Repeat:	12" x 36" (.3048 m x .9144 m)
Size:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Installation Method:	Sentry Plus Stain Protection
Stain Release Technology:	Sentry Soil Protection
Soil Release Technology:	Heavy
Foot Traffic Recommendation TARR:	




981
Yellow Pyrite



982
Orange Citrine




983
Red Garnet



984
Purple Amethyst



985
Blue Sapphire



986
Green Peridot



987
Ice Topaz



988
Pink Quartz

SUSTAINABILITY

IAQ Green Label Plus:	CRI Green Label Plus GLP1098
Pre-Consumer Recycled Content:	48%
NSF 140:	EcoFlex ICT - NSF 140Gold
Declare Label:	Declared



PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static
-------------	---

* China STOCK highlighted in red

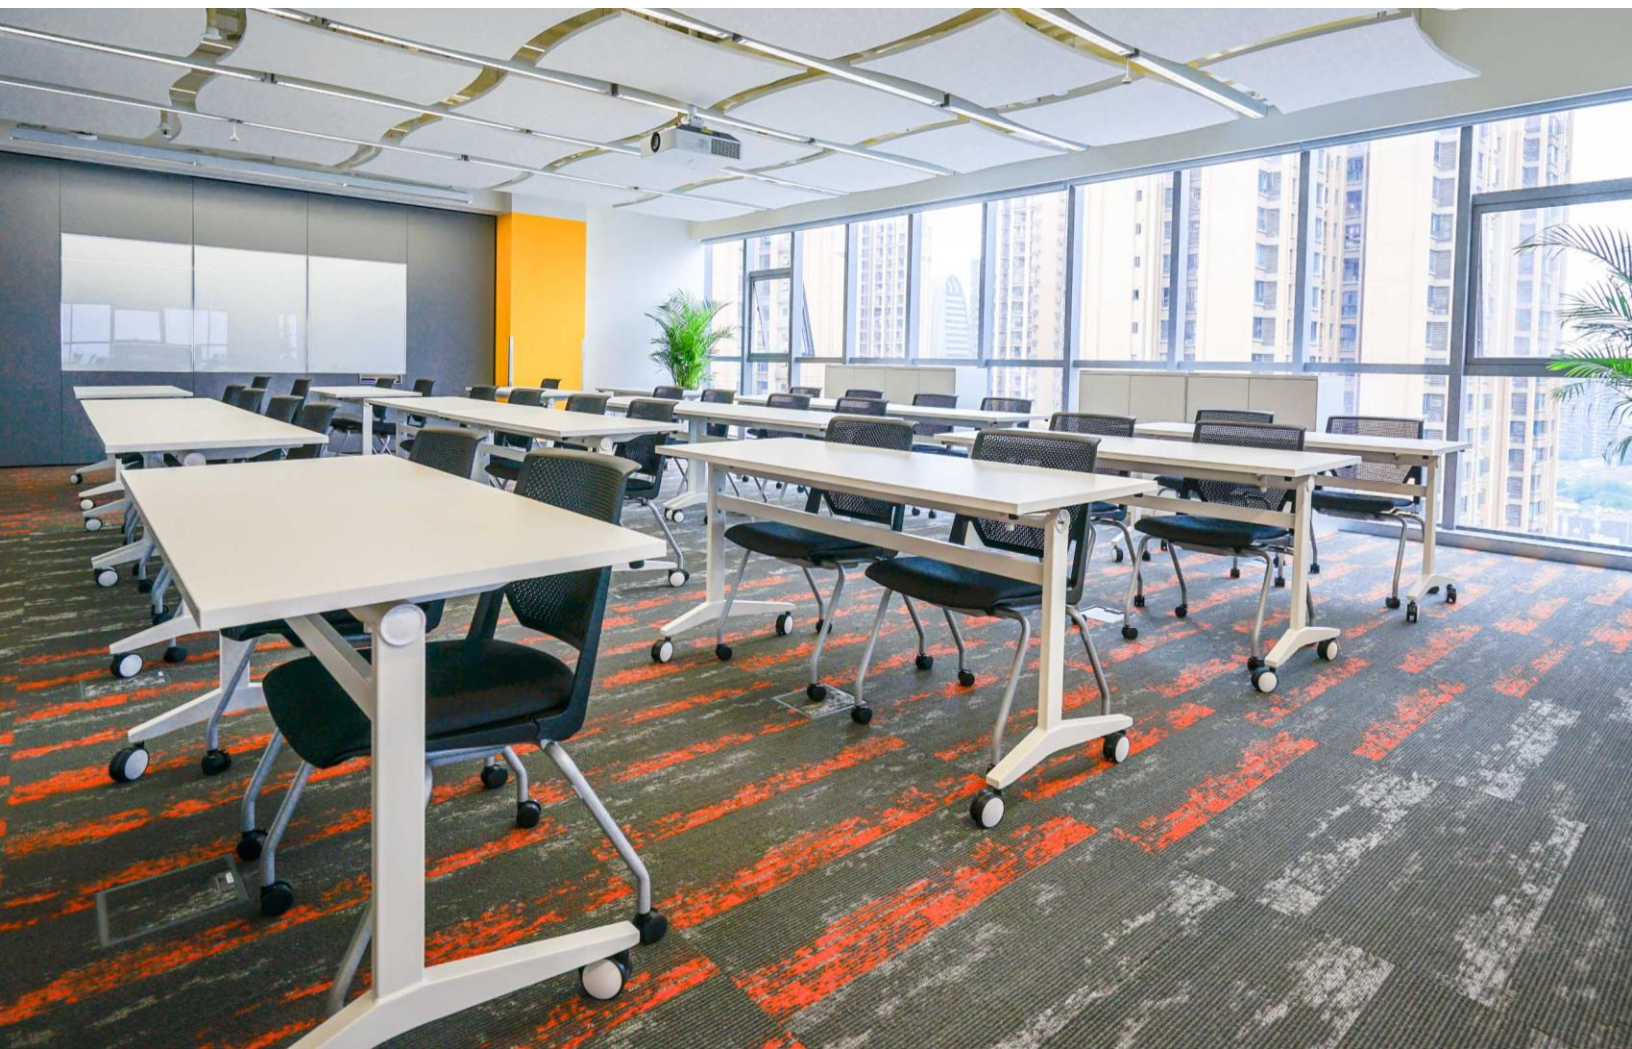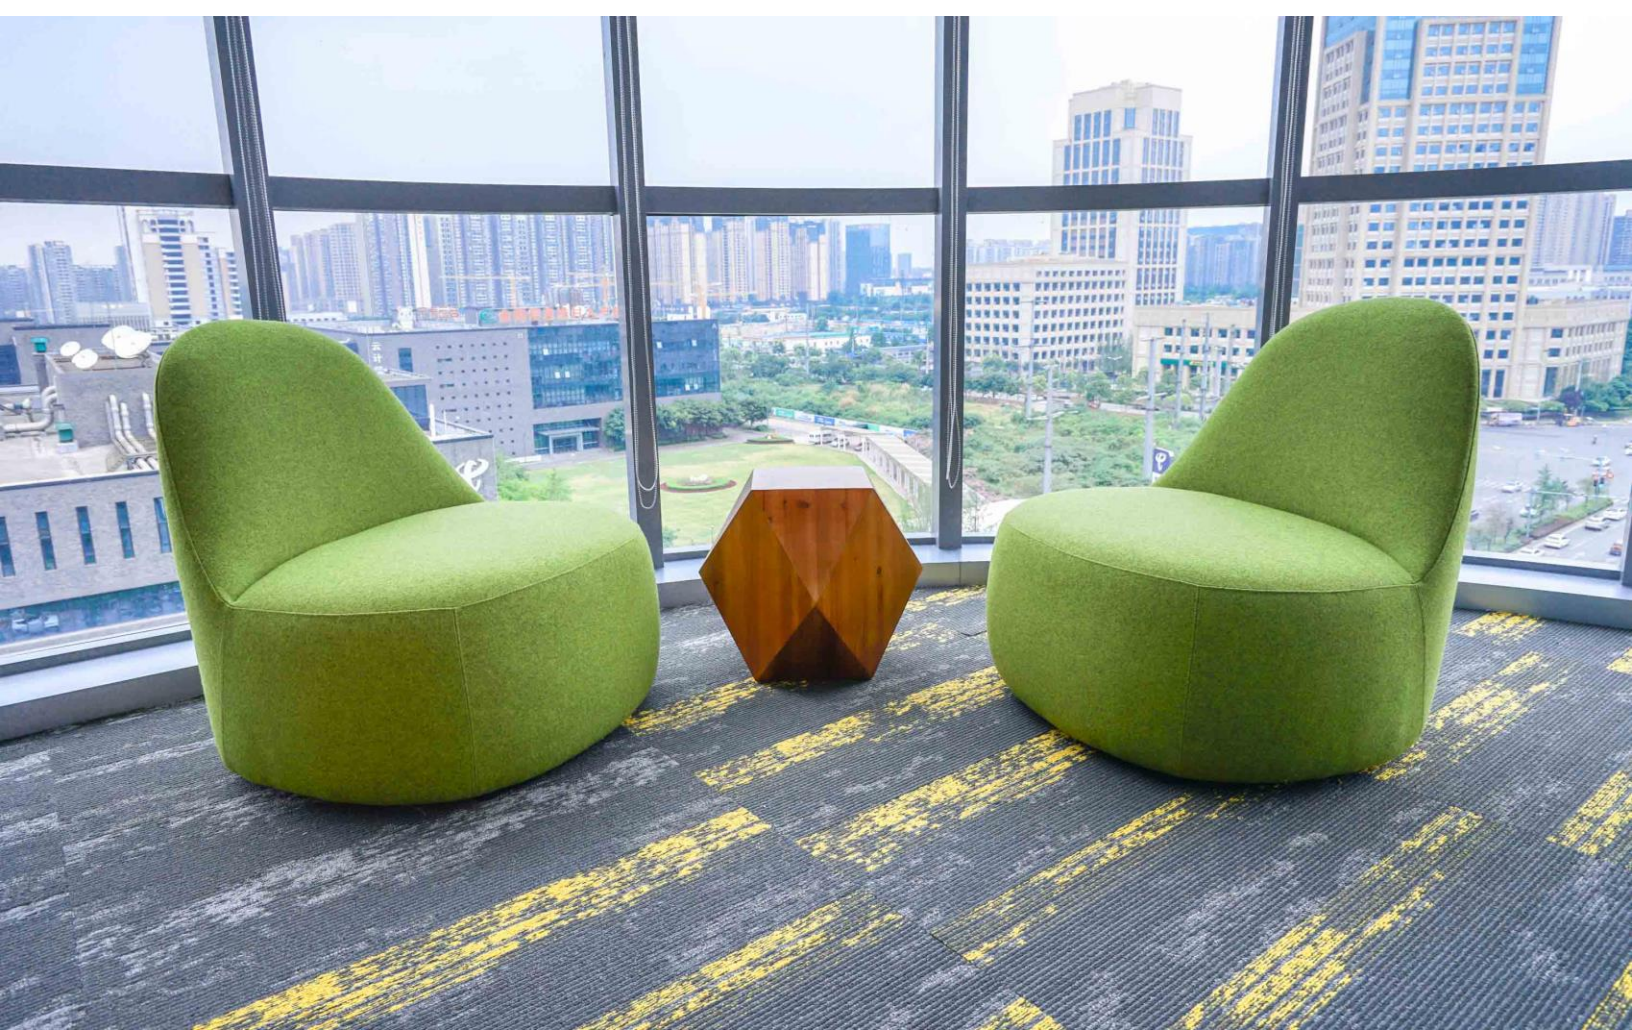






FOREVER

STAIN FREE • SUSTAINABLE • BEAUTIFUL



 Mohawk Group

duracolor
FOREVER STAIN FREE

STAIN RESISTANCE THE SCIENCE



Common Nylon

The most common stains are caused by acid-based substances that carry a negative charge. Since most fibers are positively charged, the negatively charged acid-based substances are attracted to the opposite charge of the fibers and bond, creating a stain.



Duracolor Tricor

Duracolor Tricor fiber utilizes negatively charged polymers. The negative charge of the polymer ensures that the fiber, through its inherent characteristics, will repel negatively charged substances. The fiber never allows the common stain makers to bond, so the carpet resists the stain.

TRUSTED PERFORMANCE

Duracolor fiber has set the standard of high-performance commercial carpet since 1992.


With enhanced soil hiding and removal capabilities, Duracolor Tricolor builds upon a fiber already trusted to perform in demanding environments. When compared head to head to competitive nylon products, Duracolor Tricolor delivers trusted performance.




Common Nylon Fiber



NEW CARPET WITH NO SOIL EXPOSURE

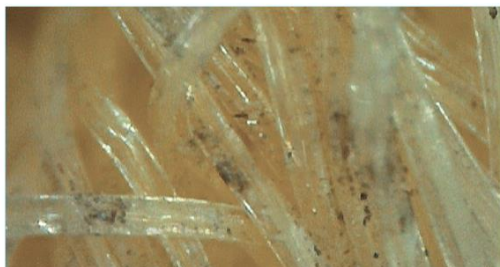


CARPET EXPOSED TO SOIL,
CLEANED USING VACUUM ONLY



Duracolor Tricolor Fiber



NEW CARPET WITH NO SOIL EXPOSURE

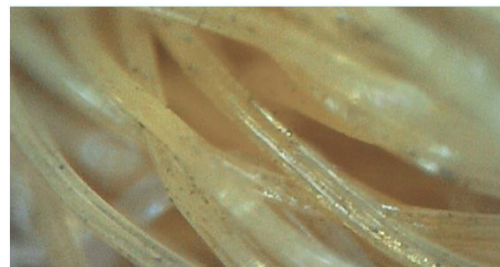

CARPET EXPOSED TO SOIL,
CLEANED USING VACUUM ONLY

Carpet Tile Warranty

Limited Commercial Lifetime Warranty – EcoFlex® ICT and EcoFlex® NXT

This limited warranty applies only to the original purchaser of Mohawk Group* carpet tiles for indoor commercial installations. This warranty applies only to EcoFlex® ICT and EcoFlex® NXT products.

The use of Mohawk Group branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk Group. Failure to use Mohawk Group branded adhesives will result in warranties being null and void. Substrates must be prepared using Mohawk Group's recommended floor preparation procedures.

Provided the designated carpet has been properly installed and maintained in the specified commercial location in strict accordance with Mohawk Group's instructions and procedures and subject to the limitations set forth herein, including the specifications and manufacturing tolerances established for the product, Mohawk Group warrants to the original Owner, the following:

I. Items Under Warranty

Mohawk Group warrants the following for the normal useful life of the carpet**:

1. **Wear** – Carpet tiles will not wear more than 10% of their surface pile weight from abrasive wear. "Abrasive wear" means fiber loss from the carpet tiles through normal abrasion, not crushing or flattening of the carpet pile in any area, nor staining, soiling, fading, or change in carpet appearance, nor fiber loss due to abnormal usage of the carpet tiles;
2. **Static** – Carpet tiles will not give static discharges in excess of 3.5 KV when tested under AATCC Test Method 134 (Step);
3. **Edge Ravel/Zippering** – Carpet tiles will not edge ravel or zipper;

4. **Delamination** Carpet tiles will not delaminate (Chair pads are recommended for maximum appearance retention and to deter delamination); and
5. **Dimensional Stability** – Carpet tiles will not lose their dimensional stability per the AACHEN test ISO 2551.

II. Limitations – This warranty does not include:

1. Disfigurement or damage caused by abnormal use or any damage to the carpet not arising out of a manufacturing defect in the carpet, including such disfigurement or damage as tears, burns, pulls, cuts, floods, excessive alkalinity, excessive moisture, installation on stairs, damage resulting from improper cleaning agents or methods, neglect, or damage in transit;
2. Edge ravel where carpet is cut for access to floor outlets and around trench header ducts;
3. Abuse by any athletic equipment such as roller skates, ski boots, or golf shoes;
4. Differential fading from light exposure, shading, pile crush, dye lot differences, or soiling;
5. Any condition that would have been visible upon inspection prior to the installation;
6. Any condition resulting from other than ordinary wear or from any use for which the product was not designed; and
7. Any issues related to moisture and alkalinity in the substrate. Moisture and pH testing are not the responsibility of Mohawk Group.